



MODEL GSP1/GSP3 GARAGE DOOR OPENER SURGE PROTECTOR

OWNER'S INSTRUCTIONS:

The surge protector defends your devices against harmful voltage fluctuations, Surges, and energy spikes.

CAUTION


TO REDUCE THE RISK OF ELECTRIC SHOCK, USE ONLY INDOORS.
It should be plugged into a parallel duplex receptacle that is interconnected.
Not for use with ground-fault circuit-interrupter receptacles or receptacles with indicator lights or control.
To reduce the risk of fire or electric shock, do not use this device with a receptacle in which the slot openings do not align with the blades.
Do not install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and the electrical service panel.
This device features an internal protection that will disconnect the surge protective component but will maintain power to the load - now unprotected. If this situation is undesirable for the application, follow the manufacturer's instructions for replacing the device.

INSTALLATION:

- Plug the Surge Protector into a 3-wire grounded 120V AC outlet.
- Plug the garage door opener into Surge Protector Outlet.
- Test the garage door opener for proper operation. Be sure to test all functions including wall control, remote, keypad, safety sensors (Door Reversal Test — See garage door opener manual for instructions) and any other accessories.

LED Light Signal:

Protection LED light indicates charging status and let you know it works properly.

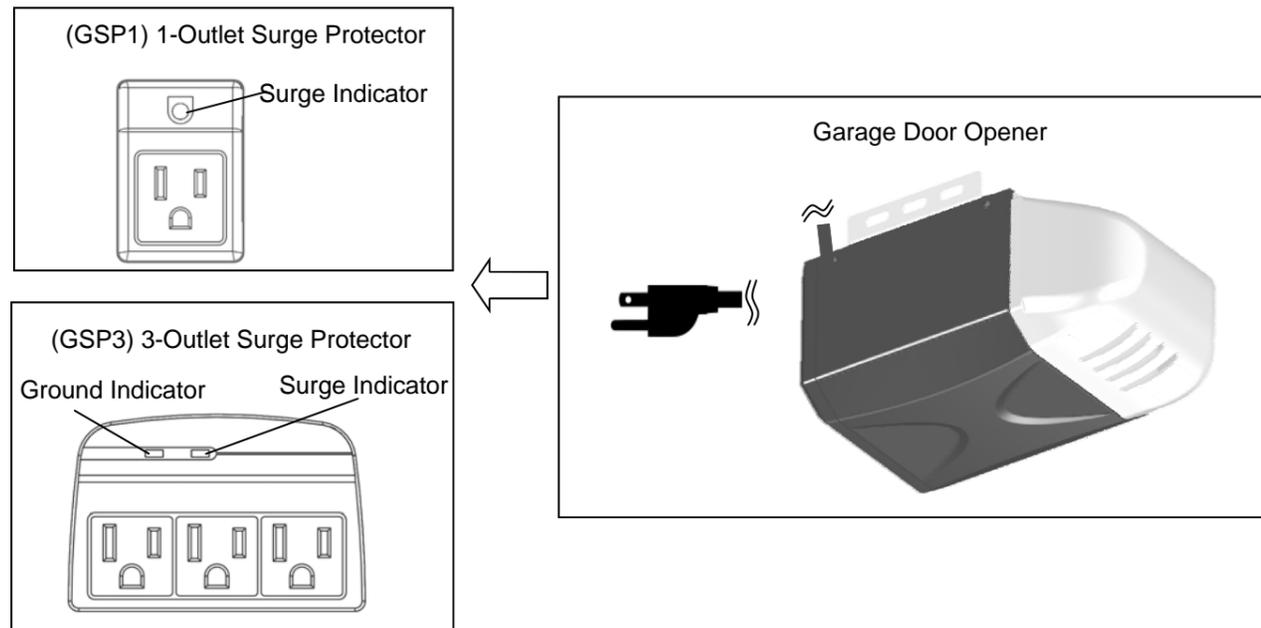


PRODUCT SPECIFICATIONS

GSP1 1-Outlet Surge Protector/ GSP3 3-Outlet Surge Protector

450 Joule energy rating for 1-Outlet Surge Protector, and 1200 Joule energy rating for 3-Outlet Surge Protector.
Safety System: Flame retardant ABS material and high quality components.

TECHNICAL SPECIFICATIONS

	GSP1	GSP3
Maximum Input Voltage (VAC)	125VAC	125VAC
Nominal Input Frequency (Hz)	60Hz	60Hz
Maximum Output Power (Watts)	1875W	1875W
Maximum Line Current (Amps)	15A	15A
Joules	450J	1200J
UL 1449 VPR RATING	800V (L-N)TYPE 3 SPD	800V (L-N)TYPE 3 SPD
Certifications	ETL & CETL listed	ETL & CETL listed
Standard	UL 498A, UL 1449	UL 498A, UL 1449
Outlet Design	NEMA 5-15R, 1 hole grounded	NEMA 5-15R, 3 holes grounded
Plug Design	NEMA 5-15P	NEMA 5-15P
Surge Indicator	Red LED Indicator	Red LED Indicator
Ground Indicator	N/A	Green LED Indicator
Max Spike Voltage	6000V	6000V
Maximum Surge Current	3000A	3000A
Noise Filtering Level (Max dB)	150KHz-100MHz up to 40dB	150KHz-100MHz up to 40dB
EMI/RFI (X-Cap)	Yes	Yes
Operating Temperature	-15 to 40 degrees Celsius	-15 to 40 degrees Celsius
Conditions of Operation	Indoor only	Indoor only



GUARDIAN LIMITED WARRANTY

Guardian warrants to the original purchaser of any Guardian Surge Protector that the surge protector shall be free of defects in material and workmanship for a period of one (1) year from the date of purchase. The proper operation of the Guardian Surge Protector may destroy the protector itself. Such an event is not a defect and is not covered by this limited warranty. This warranty covers the surge protector alone and not connected equipment.

To make a warranty claim, you will need your receipt for the Guardian Surge Protector in use during the occurrence. The surge protector should be sent to Guardian for inspection upon Guardian's request at the sole expense of the purchaser. If in the opinion of the manufacturer, the product is faulty, all defective parts will be replaced at no cost to the purchaser. If Guardian determines that the surge protector has been improperly installed, altered or modified in any way, damage did not result from the occurrence or that no occurrence in fact took place, or that the connected equipment was not used under normal operating conditions or in accordance with all labels and instructions of the manufacturer, the above warranty becomes null and void.

Subject only to the provisions of the Trade practices Act and any legislation of the State or Territory wherein the operators of the Manufacturer have been sold or installed (which may confer certain rights on consumers of goods and those rights by such legislation may be rendered incapable of exclusion) this Warranty supersedes and excludes all representations, warranties and conditions whether expressed or implied by law and the Manufacturer shall have no liability or otherwise than herein provided for any loss and damage (including consequential loss and damage, loss of use or profits) by reasons of delay, defective or faulty materials or workmanship, negligence or any act, matter or thing done permitted or omitted to be done by the Manufacturer.

Warranty

THIS WARRANTY FORM SHOULD BE COMPLETED AT TIME OF INSTALLATION

This Warranty Form should be retained by the purchaser at all times and produced with the purchase docket by the Purchaser as proof of the purchase date.

PURCHASER'S NAME: _____

PURCHASER'S ADDRESS: _____

INSTALLED BY: _____

INSTALLER'S ADDRESS: _____

INSTALLER'S SIGNATURE: _____